

Multi-application - LiFePO4 Power

CE UE-48Li300

Issued Date > 2016-07-28

Issued Version > V03

LITHIUM IRON PHOSPHATE BATTERY



1. General Information

This specification defines the performance of rechargeable LiFePO4 battery pack **UE-48Li300** manufactured by MASTER BATTERY, S.L., describes the type, performance, technical characteristics, warning and caution of the battery pack.

2. Specification (@Battery initial Temp $25\pm5^{\circ}\text{C}$)

NO.	Items	Criteria
1	Rated Capacity	300Ah
	Minimum Capacity	295Ah
2	Energy	15.36KWh
3	Nominal Voltage	51.2V
4	Outgoing Voltage	$\geq 51.2\text{V}$
5	Internal resistance	$\leq 30\text{m}\Omega$
6	Limited charge voltage	$58.4\pm 0.2\text{V}$
7	Floating charge voltage	$55.2\pm 0.2\text{V}$
8	Standard charge current	100A
9	Maximum charge current	150A
10	Standard discharge current	150A
11	Maximum discharge current	300A
12	Pulse discharge current	350A/Continuous for 20 min
13	Discharge cut-off voltage	40.0V



NO.	Items	Criteria
14	Dimension	Length: $721 \pm 3\text{mm}$
		Width: $403 \pm 3\text{mm}$
		Height: $431.5 \pm 3\text{mm}$
15	Weight	Approx: $200 \pm 15\text{Kg}$
16	Operating Temperature	Charging: $0 \sim 45^\circ\text{C}$
		Discharging: $-20 \sim 60^\circ\text{C}$
		Recommended operating temperature: $15^\circ\text{C} \sim 35^\circ\text{C}$
17	Self-discharge rate	Residual capacity: $\leq 3\%/ \text{month}$; $\leq 15\% / \text{years}$
		Reversible capacity: $\leq 1.5\% / \text{month}$; $\leq 8\% / \text{years}$
18	Storage Temperature & Humidity Range	Less than 1 month: $-20^\circ\text{C} \sim 35^\circ\text{C}$, 45% RH \sim 75% RH
		Less than 3 months: $-10^\circ\text{C} \sim 35^\circ\text{C}$, 45% RH \sim 75% RH
		Recommended storage environment: $15^\circ\text{C} \sim 35^\circ\text{C}$, 45% RH \sim 75% RH

Long time storage:

If the battery need be stored for a long time, the voltage should be 52.8V (50% SOC), and stored in the condition as storage proposal. It need at least one charge & discharge cycle every six months

3. Test Condition

3.1 Standard Test Conditions

3.1.1 Unless otherwise specified, all performance tests is required conducted at temperature $25^\circ\text{C} \pm 2^\circ\text{C}$, Humidity less than 45% ~ 75% RH.

3.1.2 Unless otherwise specified, the tested product is required unused within two month after outgoing.

3.2 Standard Charge Mode

"Standard Charge" means at $25 \pm 2^\circ\text{C}$ charge to limit voltage with 0.33C constant current, then charge with constant voltage until current less than 0.02ItA.

3.3 Quick Charge Mode

"Quick Charge" means at $25 \pm 2^\circ\text{C}$ charge to limit voltage with 0.5 C constant current, then charge with constant voltage until current less than 0.02ItA.

3.4 Standard Discharge Mode

"Standard Discharge" means at $25 \pm 2^\circ\text{C}$ discharge to the cut-off voltage with 0.33C current.

3.5 Quick Discharge Mode

"Quick Discharge" means discharge to the cut-off voltage with 0.5C current.



4. Product Performance

NO.	Items	Criteria	Testing Method
1	Rated Capacity	300Ah	Rest for 1 hour after fully charged, then discharge with 0.33C current until the battery reaches the discharge cutoff voltage. Repeat above process for three times, if the discharge time is not less than 120 minutes, you can stop and define the Discharging current*time value (Ah) as battery capacity.
2	Minimum Capacity	295Ah	
3	Internal resistance	$\leq 30\text{m}\Omega$	
4	Cycle life (DOD%100)	≥ 1875 cycles	Discharge with the current of 0.33C until it can't discharge, and then rest it for 1h. Charge the battery following CC (0.33C)/CV (14.6V) mode to full capacity, and then rest it for 1h. Repeat above process until full charged capacity is no more than 80% of normal value. Accumulated times is defined as cycle life.
5	Discharge Temperature Characteristics	-20°C	At $25 \pm 5^\circ\text{C}$ discharge the battery with the current of 0.33C to the cut-off voltage and record charge capacity. Store the battery at various temperatures for 2h and discharge the battery with 0.33C to the cut-off voltage.
		0°C	
		25°C	
		55°C	
6	Charge Retention ability	Residual capacity $\geq 80\%$	Charge the battery to full capacity and store it for 28 days, and then discharge it with 0.33C to the cut-off voltage.
		Recovery capacity $\geq 90\%$	

5. Protective Circuit Specification


The batteries are supplied with a LiFePO₄ Battery Management System (BMS) that can monitor and optimized each single prismatic cell during charge & discharge, to protect the battery pack overcharge, over discharge, short circuit. Overall, the BMS helps to ensure safe and accurate running.




Items	Content	Specification
Over charge	Over-charge protection for each cell	$3.80 \pm 0.03V$
	Over-charge release for each cell	$3.60 \pm 0.05V$
	Over-charge release method	Under the release voltage
Over discharge	Over-discharge protection for each cell	$2.50 \pm 0.05V$
	Over-discharge release for each cell	$2.80 \pm 0.05V$
	Over-discharge release method	Charging recovery
Over current	Discharge over current protection	420~500A
	Protection delay time	20 - 40ms
	Over current release method	Release after cutoff the load
Short	NO	Ban electrode short circuit
Battery temperature	Charge over temperature	Protection @ $55 \pm 5^{\circ}C$
		Release @ $45 \pm 5^{\circ}C$
	Discharge over temperature	Protection @ $65 \pm 5^{\circ}C$
		Release @ $55 \pm 5^{\circ}C$
	Charge over temperature protection relay	Protection @ $95 \pm 5^{\circ}C$
		Release @ $85 \pm 5^{\circ}C$
	Discharge over temperature protection relay	Protection @ $95 \pm 5^{\circ}C$
		Release @ $85 \pm 5^{\circ}C$
Static power	Since the power consumption $\leq 3mA$; After discharge protection $\leq 150uA$	
Screen	Short press a switch, light and display screen: voltage temperature residual capacity current, light up after waiting for screen to go out, after 60s into power saving state (buzzer open state, the buzzer alarm detection background), short press it again to light up the screen.	
Buzz	Buzzer open state: SOC 10% or less, buzzer alarm, long press switch 3s, buzzer close and screen OFF buzzer hints.	
	Buzzer is turned off, when the SOC 50% or less, need to manually by 3s starting buzzer long (SOC testing and determine whether the alarm).	
	Buzzer is turned off, charging when the battery pack is SOC > 50%, the buzzer closed automatic reset, in an open position.	



6. Dimensional Drawing

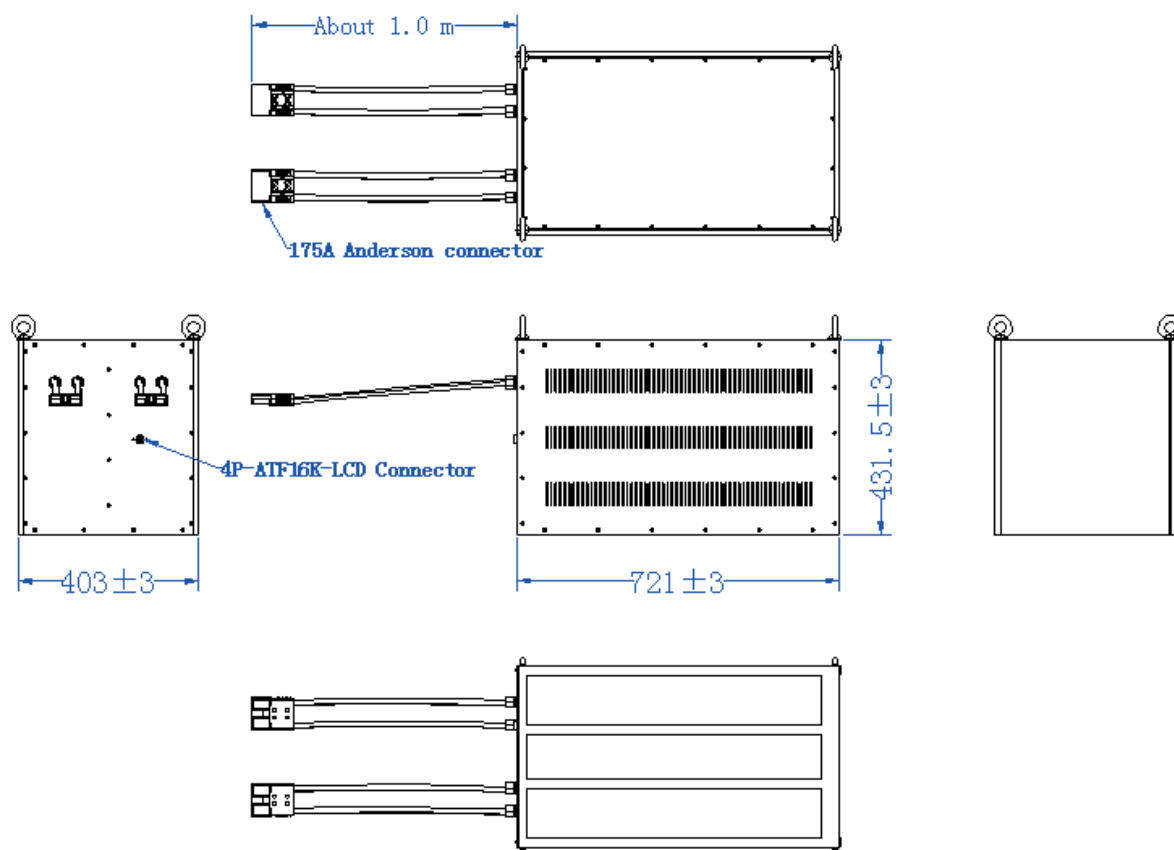

7. 4P - Air head Pin definition (main board and display)

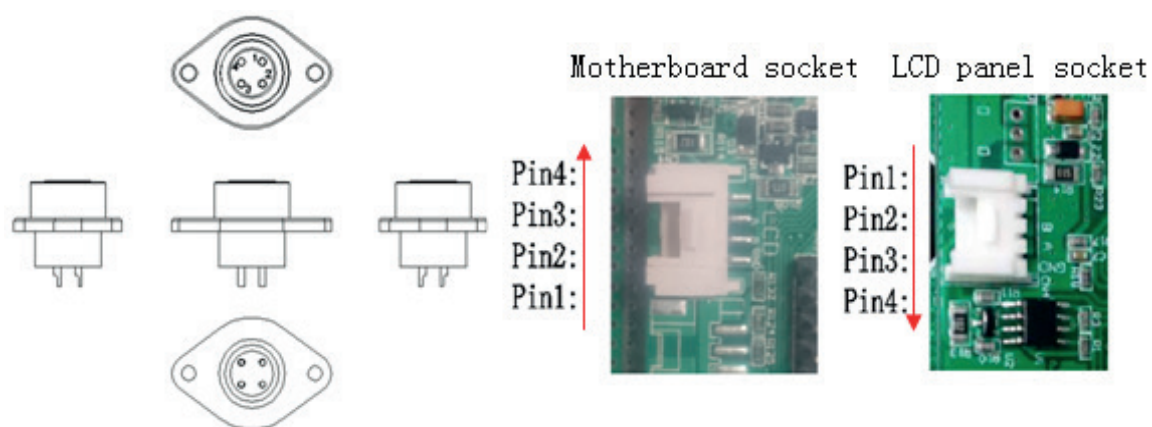

1. The motherboard socket: Pin1 to 12V+, Pin2 to B, Pin2 to A and Pin4 to GND.
2. The LCD panel socket: Pin1 to 12V+, Pin2 to B, Pin2 to A and Pin4 to GND.
3. Battery iron box matching LCD communication shielding wire is about 4m.



8. Transportation

- Based on the character of cell, proper environment for transportation of LiFePO₄ battery pack need to be created to protect the battery.
- Battery should be stayed in the warehouse 15°C ~ 35°C where it's dry, clean, shade and well-ventilated.
- The battery should be stored in 50% SOC during transportation.
- The battery need to be charged every 6 months if out of use.
- Keep the battery against dropping, turning over and serious stacking during loading.

9. Warning & Tips

Please read and follow the specification and caution remarks on battery surface before use the battery. Improper use may cause heat, fire, rupture, damage or capacity deterioration of the battery. MASTER BATTERY, S.L. describes is not responsible for any accidents caused by the usage without following our specification.

- The battery must be far away from heat source, high voltage, and avoid to be exposed in sunshine for long time.
- Never throw the battery into water.
- Do not put the battery in a charger or equipment with wrong terminals connected.
- Never connect the positive and negative of battery with metal.
- Avoid excessive physical shock or vibration. don't hit, fall, stamp on the battery.
- Without the permission of the manufacturer and guidance, forbidden to remove or to assemble the battery.
- Do not use the battery mixed with other different manufacturer, type, or model batteries.
- Keep the battery against high temperature. Otherwise it will cause battery heat, get into fire or lose some function and reduce the life.
- When battery run out of power, please charge your battery timely (≤ 15 day).
- Please use the matched or suggested charger for this battery.
- If battery emit peculiar smell, heating, distortion or appear any abnormality during working or storage, please stop using and take it out from device.
- If the battery leaks and get into the eyes or skin, do not wipe, instead, rinse it with clean water and see doctor immediately.
- Please far away from children or pets.
- Do not put disuse battery into a fire or water.
- It is strictly prohibited any series between the battery packs. Any requirements on serials connection, please contact MASTER BATTERY, S.L. for details.



10. Battery Operation Instruction

10.1 Charge and discharge

10.1.1 Charging current: Do not surpass the largest charging current that specification stipulated.

10.1.2 Charging voltage: Do not surpass the highest limited voltage that specification stipulated.

10.1.3 Charging temperature: within temperature scope that specification stipulated.

10.1.4 Charge with constant current, then with the constant voltage, no reverse charge, which is dangerous.

10.1.5 Special note:

Short time doesn't affect the use of the battery overcharge too, but for a long period of time over discharge or over charge can affect the function of the battery failure, or the battery can't use permanent, appear serious safety hazards, need long time floating please use the recommended floating model specification. Battery when not in use for a long time, because of its own self-discharge characteristics can also cause discharge, to prevent the occurrence of a discharge, battery should maintain a certain capacity, maintain the voltage at 50% state of SOC.

11. Other Chemical Reaction

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges, the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the discharge time is much shorter than the normal after full charged, even battery is charged correctly, and this may indicate it is time to change the battery.

