

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET



MasterPower®

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET

FEATURES

- 10 Years Performance Warranty
- Backup / Genset Input Integrated
- Fire Safety with Alarms, Valves, Smoke / CO sensors, UL 9540A Certified
- Off-grid Expandable up to 6 Parallel On-grid Expandable up to 20 Parallel
- 280 Ah large capacity cell, higher energy density
- Integrated self-developed BMS / EMS for flexibility
- Small size, small footprint Long-lasting battery cycle life
- Compact design saves space Cloud control with 24/7 monitoring



FUNCTIONS

- MF-SCS-197K-DC-UE system serves as a multiple energy source gateway.
- It efficiently controls and distributes power from various sources, including mains electricity, solar photovoltaics, and diesel generators. The system supports multiple grid-connected modes such as self-consumption, time-of-use, and peak shaving, tailored to diverse customer needs.
- In off-grid scenarios, it operates in complementary modes like PV-Battery or PV-Battery-Diesel Generator.
- In the event of a mains power outage, it seamlessly switches to backup mode in less than $< 10\text{ms}$, ensuring a continuous power supply for users.

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET

FUNCTIONS



AC capacity 80 - 125 kW

Battery capacity ranges from 197 kWh~233 kWh



On Grid:
Export Limit/Import Limit

Off Grid
On/Off Grid Switching



>150% of the
system capacity



Support Both DC coupling
and AC coupling PV-ESS
Solution



Factory Load is
supported

Motor load shall be not
more than 1/3 of the
system capacity



Support PV-ESS-EV
Charger smart control

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET

PRODUCT SPECIFICATIONS

Technical Parameters	
Battery Type	LFP
Battery Module Capacity	17.92 kWh
Number of Modules	11
Total Battery Capacity	197.12 kWh
Nominal Voltage	704 V
Operating Voltage Range	627 ~ 792 V
Charge / Discharge Rate	0.5 C
DoD	90%

General Parameters	
Dimensions (W x H x D)	1300 x 2380 x 1442 mm
Weight	< 2.5 T
Installation Site	Outdoor
IP Protection	IP54
Anti Corrosion Level	C4
Operation Humidity	5% ~ 95% (No Condensing)
Operation Temperature	-30°C ~ +50°C
Max. Operation Altitude	≤ 3000 m

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET

PRODUCT SPECIFICATIONS

General Parameters

Communication Port	Ethernet; CAN
Communication Protocol	CAN; TCP
Cooling Method	Air Conditioner
Certificates	UN38.3; MSDS; IEC 62040; IEC 62477; IEC 62619; IEC 63056; IEC 61000-6-2/4

PV Side

MPPT Voltage Range	250 ~ 950 V (Max. 1000 V)
MPPT Rated Voltage	720 V
MPPT Rated Voltage (Full Load)	450 ~ 800 V
Max. PV Power	160 kWp
Number of MPPT / Strings per MPPT	8 / 2
Max. Current per MPPT	45 A

Battery Side

Battery Voltage Range	250 ~ 900 V
Battery Rated Voltage Range	250 ~ 800 V
Max. DC Current	160 A (80 A x 2)
Max. DC Power	88 kW
Number of DC Inputs	2

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET

PRODUCT SPECIFICATIONS

AC Side (On Grid)

Nominal AC Output Power	80 kW
Max. AC Output Power	88 kVA
Rated AC Current	116 A
Max. AC Current	240 A
AC Rated Voltage / Voltage Range	230 / 400 Vac; 220 / 380 Vac; 3L+PE+N; -15% ~ +10%
Nominal Grid Frequency / Frequency Range	50 Hz / 60 Hz (±5 Hz)
THDi	< 3% (100% Load)
Adjustable PF Range	-0.8 (Lagging) ~ 0.8 (Leading)

Backup Output

Nominal AC Voltage	230 / 400 V; 220 / 380 Vac; 3L+PE+N
THDv	< 3% (Rated Power)
Nominal Grid Frequency / Frequency Range	50 Hz / 60 Hz
Nominal AC Output Power	80 kW
Max. AC Output Power (Single-phase)	50 kW
Max. Output Current	220 A

Efficiency

Max. Efficiency	98 %
-----------------	------

MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET

PRODUCT SPECIFICATIONS

Genset Input

Max. Input Current	220 A
--------------------	-------

Protection

Reverse DC Connection Protection	Yes
Anti-Islanding Protection	Yes
Over-Temperature Protection	Yes
Grid Monitoring / Earthing Fault Detection	Yes
Insulation Monitoring	Yes
DC / AC Surge Protection	DC Type II; AC Type III
AFCI	Optional

General Parameters

Dimensions (W x H x D)	635 x 1100 x 330 mm
Weight	> 95 kg
Topology	Transformerless
IP Protection	IP65
Operation Temperature Range	-25 ~ 60°C (> 45°C Derating)
Operation Humidity Range	0 ~ 100% (No Condensing)
Cooling Method	Intelligent Air Cooling
Max. Operation Altitude	4000 m (> 3000 m Derating)
Communication Port	RS-485 / CAN


MF-SCS-197K-DC-UE

HYBRID INVERTER

THREE PHASE 197 kWh CABINET


SYSTEM CONFIGURATION

The MF-SCS-197K-DC-UE system features a hybrid inverter and a series-connected battery cabinet, with the option to add an additional cabinet for expansion.

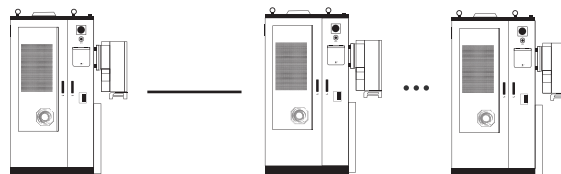


APPLICATIONS


On-Grid Solution

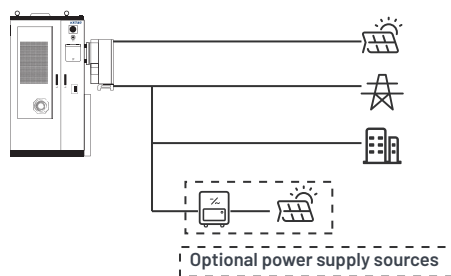

Up to 20 Unit System in Parallel

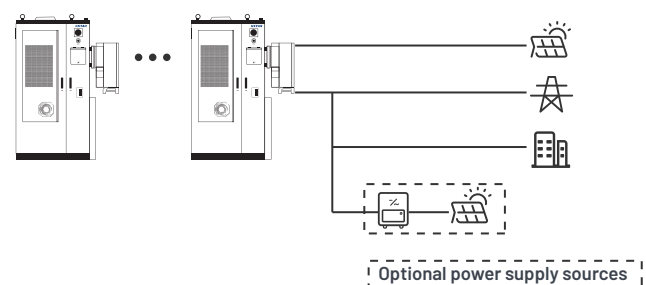

On/off Grid Solution & Off Grid Solution

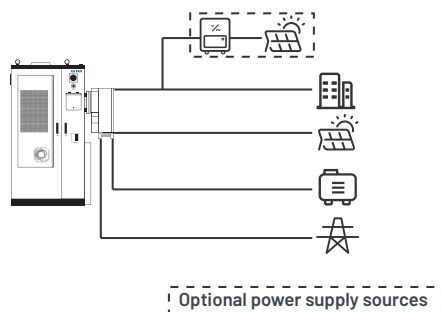

Up to 6 Unit System in Parallel

