


# OFF-GRID

MasterPower  
Unlimited power

## Omega Series UM v4 3K-24 OFF-GRID INVERTER

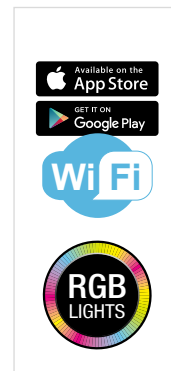

### Features

- Customizable status LED ring with RGB lights.
- Touchable button with 4.3" colored LCD.
- Built-in Wifi for mobile monitoring (App is available).
- Supports USB On-the-Go function.
- Data log events stored in the inverter.
- Reserved communication port (RS485, CAN-BUS or RS232) for BMS.
- Battery independent design.
- Battery equalization extends lifecycle.
- User-friendly LCD operation.
- Enhanced charging power.
- Built-in anti-dust kit.

### User-programmable RGB lighting for different operation mode



Pink Orange Yellow Green Blue Sky Blue Purple

### Three lighting effects



#### Cycling

Quickly scrolling with a color of your choice in a continuous circular motion.



#### Wheel

Illuminates with twinkling lights in a color of your choice.



#### Chasing

Radiates your selected color upward from the bottom of the ring.

### Technical Specifications

Rated Power	3600 VA / 3600 W
<b>INPUT</b>	
Voltage	230 VAC
Selectable Voltage Range	170 - 280 VAC (For Personal Computers); 90 - 280 VAC (For Home Appliances)
Frequency Range	50 Hz / 60 Hz (Auto sensing)
<b>OUTPUT</b>	
AC Voltage Regulation (Batt. Mode)	230 VAC $\pm$ 5%
Surge Power	7200 VA
Efficiency (Peak)	90% ~ 93%
Transfer Time	15 ms (For Personal Computers); 20 ms (For Home Appliances)
Waveform	Pure sine wave
No Load Consumption	40 W
<b>BATTERY</b>	
Battery Voltage	24 VDC
Floating Charge Voltage	27 VDC
Overcharge Protection	33 VDC
<b>SOLAR CHARGER &amp; AC CHARGER</b>	
Solar Charger Type	MPPT
Maximum PV Array Power	4000 W
MPPT Range @ Operating Voltage	180 ~ 450 VDC
Max. PV Array Open Circuit Voltage	500 VDC
Maximum Solar Charge Current	120 A
Maximum AC Charge Current	100 A
Maximum Charge Current	120 A
<b>PHYSICAL</b>	
Dimension, (D x W x H)	115 x 300 x 400 mm
Net Weight	9.0 kg
Communication Interface	USB / RS232 / RS485 / WiFi / Dry-contact
<b>OPERATING ENVIRONMENT</b>	
Humidity	5% to 95% Relative Humidity (Non-condensing)
Operating Temperature	-10°C to 50°C
Storage Temperature	-15°C to 60°C

Product specifications are subject to change without further notice.



Paseo de Extremadura, 39 - 28935 Móstoles - Madrid (Spain)  
Tel. +34 918 021 649 - Fax. +34 917 750 542  
info@masterbattery.es - www.masterbattery.es/en

