


UE-WM Series 307Li55-WM WALL MOUNTED

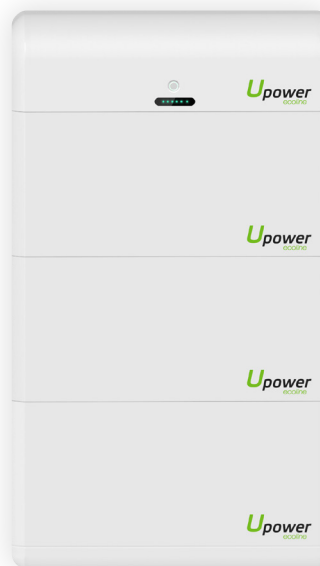

Product Advantages

- More than 5000 life cycles.
- More than 10 years of useful life.
- Support a variety of communications, can communicate with a variety of inverters.
- Products cover 10-20 kWh capacity segment.
- The product supports parallel connection and expansion.
- Simple appearance design, easy installation.

Specifications

Rated Energy	15.3 kWh
Number of Modules	3
Cell Type	LFP (LiFePO ₄)
Internal Resistance	≤ 100 mΩ
Cycle Life	≥ 5000 Cycles @80% DOD 25°C / 0.5C ≥ 4000 Cycles @80% DOD 40°C / 0.5C
Communication Port	RS485 / CAN
Charge Cut-off Voltage	340 V ± 2 V
Discharge Cut-off Voltage	270 V ± 2 V
Max. Working Current	50 A
Charge Temperature	0°C to 55°C, 32°F to 131°F
Discharge Temperature	-20°C to 60°C, -4°F to 140°F
Storage Temperature	-20°C to 40°C, -4°F to 104°F
Dimensions (W/D/H)	630*185*1290 mm
Pack Weight	180 kg
Protection Class	IP55
Certificate	UN38.3 / MSDS / CE / UL1973 (cell) / IEC62619 (cell)
Design life	10 Years
Inverter	MasterPower, Goodwe, Deye, Sermatec, Growatt, Solis

Product specifications are subject to change without further notice.